


Quality Paints since 1845
MATHYS[®]

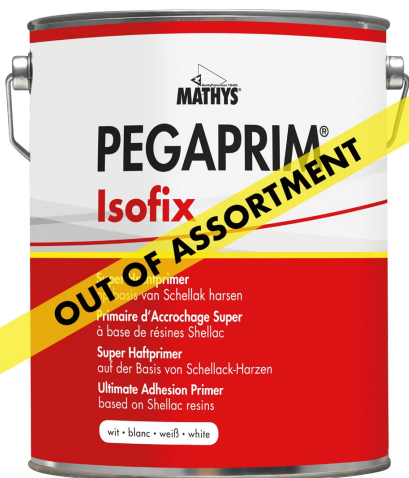

PEGAPRIM[®] ISOFIX

Super adhesion and stain block primer

- Very fast drying
- Closed, good adhering paint film
- Masks odours
- Recoatable with most water and solvent borne decorative paints
- Can be applied at freezing temperatures

PEGAPRIM® ISOFIX

DESCRIPTION

Ultra insulating and fast drying universal adhesion primer based on solvent borne Shellac-resins.

RECOMMENDED USE

INTERIOR AND EXTERIOR.

Adhesion on metal (copper, bronze, stainless steel) and on smooth hard surfaces (old paint layers, Formica). Exterior uses of Pegaprim Isofix are strictly and exclusively limited for spot priming application as a sealer.

TECHNICAL DATA

Density (g/cm ³):	± 1,2
Gloss Level:	Satin
Gloss level at 60°:	Satin: ± 10%
Solids Content in weight:	± 54 %
Solids content in volume:	± 30 %

DRY TIMES BY 20° C/RH 50%

Touch dry:	15 minutes
Dry to recoat:	45 minutes
Fully cured:	1 day

RECOMMENDED WET FILM THICKNESS

100 µm

RECOMMENDED DRY FILM THICKNESS

30 µm

THEORETICAL CONSUMPTION

± 10 m²/l

PRACTICAL CONSUMPTION

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

SURFACE PREPARATION

The substrate should be clean, dry and stable. If necessary, degrease. Contamination has to be removed as thoroughly as possible. Strongly solvent borne topcoats must be tested for their tolerance first (e.g. polyurethane, epoxy).

DIRECTIONS FOR USE

To ensure homogeneity, coating materials should be thoroughly stirred prior to use.

APPLICATION CONDITIONS

> -1°C, < 80% R.H.

APPLICATION & THINNING: ROLLER

Apply undiluted.

APPLICATION & THINNING: AIRLESS SPRAY

Nozzle: 0,015 inch / Pressure: 150 - 200 bars

APPLICATION & THINNING: AIR-ATOMISED SPRAY

Dilute with ± 2% volume denaturised alcohol.

CLEANING OF EQUIPMENT / SPILLS

Denaturised alcohol.

REMARKS

In case of too fast evaporation or spraying, add ± 2% volume denaturised alcohol.

SAFETY DATA

VOC level:	480 g/l
VOC readymix:	500 g/l
VOC category:	A/i
VOC limit:	500 g/l
Remarks regarding safety:	Consult Safety Data Sheet and Safety Information printed on the can.

SHELF LIFE

Minimum of 3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35°C.

Date issued: 07/02/2025

Available colours & pack sizes: Please refer to the respective product page on www.rust-oleum.eu for an overview of actual available colours and pack sizes.

Disclaimer: The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from www.rust-oleum.eu or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0)1914 113 146
F : +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu